

# SP


## Dry and adiabatic cooling

### Engineering data

**REMARK:** Do not use for construction. Refer to factory certified dimensions & weights. This page includes data current at the time of publication, which should be reconfirmed at the time of purchase. In the interest of product improvement, specifications, weights and dimensions are subject to change without notice.

**Last update:** 30/06/2019

### SP 2B D410-B- T610-B

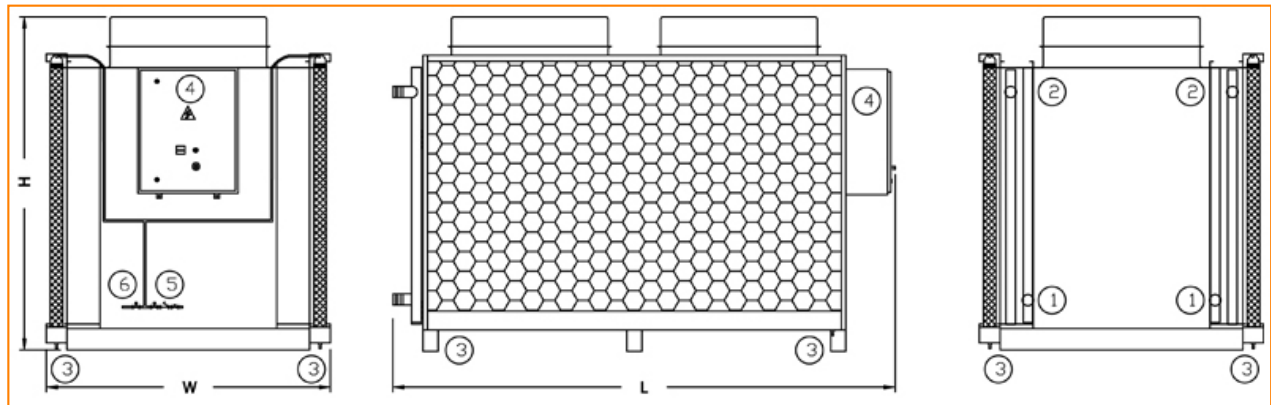

1. Fluid inlet connections; 2. Fluid outlet connections; 3. Pre-cooler water drain; 4. Electrical panel; 5. Pre-cooler city water connection; 6. Pre-cooler piping drain.  
On model SP2B-D610-B the fluid-in connections are located at the opposite side of the unit.



Model	Nr. of Fans	Weights (kg)			Dimensions (mm)			Air Flow (m³/s)		Tube Internal Volume (dm³)	Surface (m²)	Connections
		Oper. Weight (kg)	Ship. Weight(kg)	Heaviest Section (kg)	L	W	H	Δ	Υ			
SP 2 B-D410-B	2	2010	1800	1800	4016	2350	2602	32.0	25.0	94.0	1592.0	2
SP 2 B-D610-B	2	2260	2000	2000	4016	2350	2602	30.5	23.8	140.0	2388.0	2
SP 2 B-H410-B	2	2010	1800	1800	4016	2350	2602	32.0	25.0	94.0	1592.0	2
SP 2 B-H610-B	2	2260	2000	2000	4016	2350	2602	30.5	23.8	140.0	2388.0	2
SP 2 B-L410-B	2	2010	1800	1800	4016	2350	2602	32.0	25.0	94.0	1592.0	2
SP 2 B-L610-B	2	2260	2000	2000	4016	2350	2602	30.5	23.8	140.0	2388.0	2
SP 2 B-M610-B	2	2260	2000	2000	4016	2350	2602	30.5	23.8	140.0	2388.0	2
SP 2 B-S410-B	2	2010	1800	1800	4016	2350	2602	32.0	25.0	94.0	1592.0	2
SP 2 B-S610-B	2	2260	2000	2000	4016	2350	2602	30.5	23.8	140.0	2388.0	2
SP 2 B-T610-B	2	2260	2000	2000	4016	2350	2602	30.5	23.8	140.0	2388.0	2